

# CURVED HIGH DENSITY PU WALL COVING PUROTOUCH®

| SKU: TAGC362-2M




ULTRA LEDs

[ultraleds.co.uk](http://ultraleds.co.uk)

0800 088 3300

[orders@ultraleds.co.uk](mailto:orders@ultraleds.co.uk)

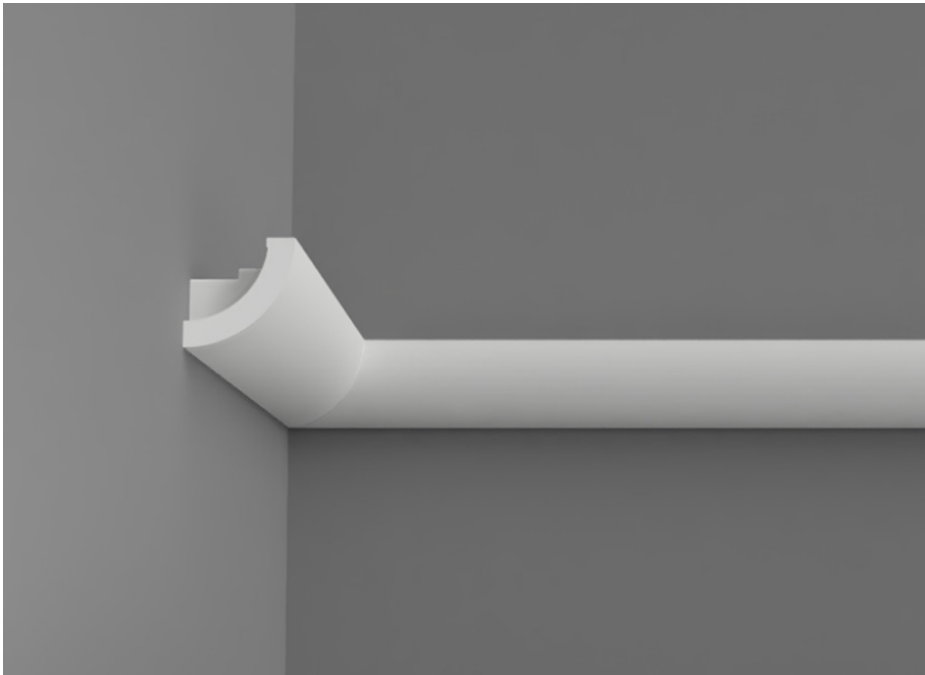

PU

WHITE

± 215  
kg/m<sup>3</sup>  
Density



100%  
CFC Free


## TECHNICAL INFORMATION

### Technical Info


|                   |   |
|-------------------|---|
| Composition       | PU - Polyurethane                           |
| Hardness          | > 30 shore D                                |
| Density           | ± 215 kg/m <sup>3</sup>                     |
| Thickness         | 8mm > 30mm                                  |
| Fire Standard     | E   |
| Environment       | CFC free                                    |
| Toxic             | Free of asbestos, cyanides and formaldehyde |
| Water Absorption  | < 0.1%                                      |
| Heat Conductivity | $\lambda = 0.029 \text{ W/mK}$              |

### Dimensions

LED Profile (CHAN-178)





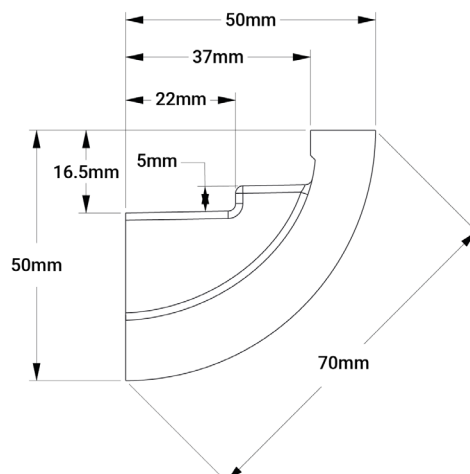







Polyurethane Coving



## FEATURES & BENEFITS

- A highly defined sculpting process results in high definition shaping and detailing
- Pre primed and ready for painting
- Easy to finish with high quality paints
- Easy to cut, sand and mitre to requirements
- Suitable for outdoor use when treated correctly
- Abrasion resistance, great for installations at floor level
- Resistant to common solvents and light moisture as standard
- High Heat Resistance, 70°C Max

## Installation

|   |   |  |
|---|---|--|
|  <p>Interior: porous and dry surface</p>         |   |  <p>Heavy profiles or Exterior: non-porous or humid surface</p>                    |
|  <p>Sealing to wall/ceiling</p>                  |  <p><b>DecoFix Pro</b><br/>Strong, water-based acrylic installation adhesive</p> |  <p><b>DecoFix Power</b><br/>Very strong MS-Polymer-based installation adhesive</p> |
|  <p>Joints between mouldings</p>                 |  <p><b>DecoFix Extra</b><br/>Polyurethane-based adhesive</p>                     |  |
| <p><b>DecoFix Pro</b><br/>Surface treatment</p>  | <p><b>DecoFix Power</b><br/>Surface treatment</p>                                | <p><b>DecoFix Extra</b><br/>Surface treatment</p>                                  |

## Storage and Installation Conditions



- Store profiles and adhesives at room temperature
- Wait 24 hours before installing to ensure correct temperature

## Gallery

