

12V TAGRA® PROFESSIONAL THIN LED DRIVER, IP67, 60W

| SKU: TAGTHIN12V60WIP67



12V

IP67



SILVER

SELV



EMC



TECHNICAL INFORMATION

Specifications

Output	Start Up Time	< 1.0 secs
	Output Voltage	12V +/- 5%
	Output Current	0 - 5A
	Output Voltage Wave	< 300mV
	Output Overload	Yes
Input	Input Voltage	AC100-240V
	Input Frequency	50/60Hz
	Input Current	< 0.8A
	Input Power	< 70W
	Efficiency	> 86%
	Standby	< 0.5W
	Inrush Current	< 50A
Environment	Power Factor	> 0.9
	Operating Temp.	-20°C~60°C
	Relative Humidity	45%~85% RH
	Max. Case Temp.	85°C
	Lifetime	50,000 Hours
	Working Noise	Yes



ULTRA LEDs



ultraleds.co.uk



0800 088 3300




orders@ultraleds.co.uk

FEATURES & BENEFITS

- High Cost Performance
- SELV
- Open Circuit Protection
- Short Circuit Protection
- Overload Protection
- Over Temperature Protection
- Compliance to ERP directive
- Slim linear design
- Lifetime 50,000 Hours

Mechanical	Case Material	Aluminium
	Mounting	Independent
	Insulation Type	Class I
	IP Rating	IP67
	Input Cables	H05RN-F 2 x 1.0mm ²
	Output Cables	SJTW 18AWG x 2C
	Output Cables Length	Max. 2 Metres
Protection	Open Circuit	--
	Overload	Yes
	Short Circuit	Yes
	Over Temperature	--
	Over Voltage	Yes
	Auto Recovery	Yes
	Latch Off	Yes
Safety & EMC	Safety	IEC61347-1 IEC61347-2-13
	Harmonic	EN61000-3-2 Class C
	EMI	EN55015
	EMS	EN61000-4-2,3,4,5,6
		EN61547

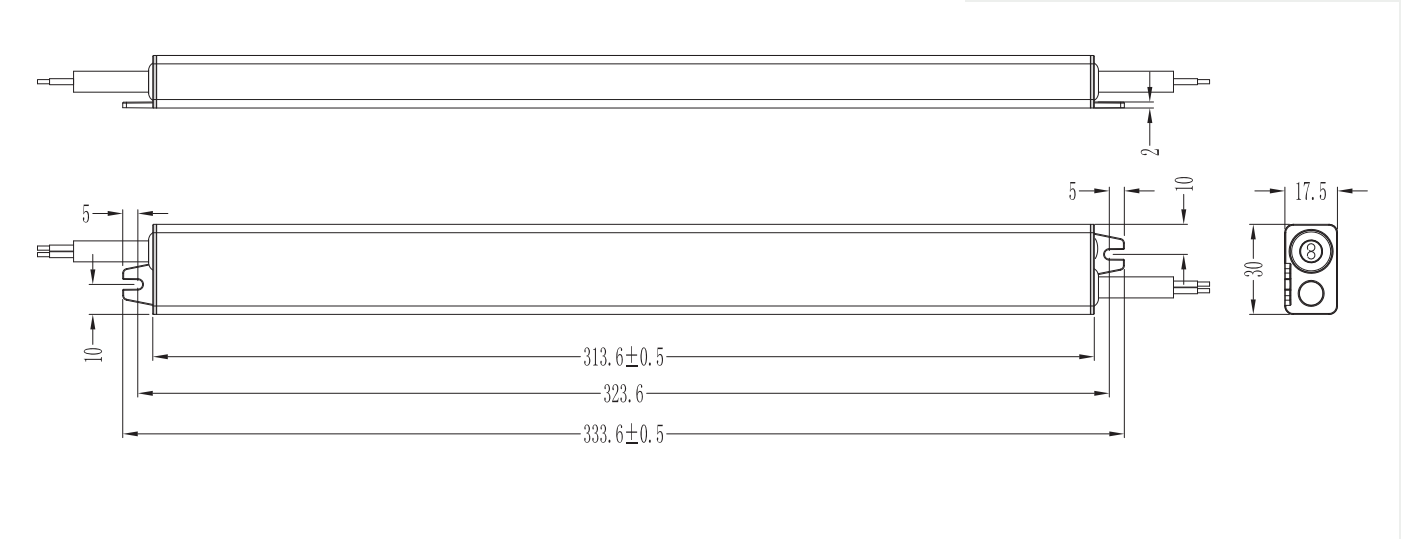

DIMENSIONS