

**Professional High Efficiency**  
**- 24V - 2700K - 90 LEDs p/m - IP20 - 5m Reel**



**SKU: PH24-27K-90-5M-80**



**5M**

**24V**


**90**  
LEDs/m

**IP20**

**2700K**

- ▶ 2700K
- ▶ 90 LEDs per metre
- ▶ 100mm Cut Points
- ▶ 5 Metre Reel
- ▶ 3 Year Warranty

**Dimensions**

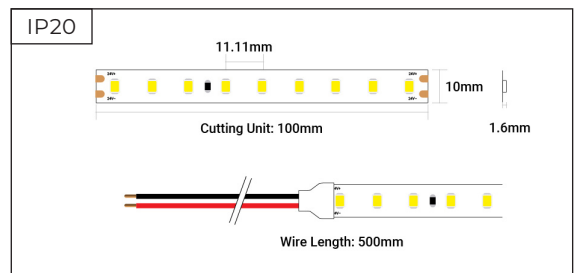

**Electrical Data**

SKU	Voltage	Current Consumption			Power Consumption		
		Max.	Typ.	5m	Max.	Typ.	5m
PH24-27K-90-5M-80	24V	0.20A/m	0.18A/m	0.72A	4.8W/m	4.3W/m	17.3W

**Photometric & Light Data**

SKU	Colour Temp	Dimmable	SDCM	Beam Angle
PH24-27K-90-5M-80	2700K	Yes	< 2	120°

Colour	CCT / Wavelength	Lumens / m	Lumens / W	CRI
2700K	2700K	845	197	>80

**Mechanical Data**

SKU	IP Rating	Cut Points	Cable Length	Cable End	LEDs / m
PH24-27K-90-5M-80	IP20	100mm	500mm	Dual End	90 LEDs

SKU	Adhesive Type	Bend Diameter	Operating Temp	Warranty
PH24-27K-90-5M-80	3M	∅ 60mm	-25°C ~ +40°C	3 Years

SKU	Length	Width	Height
PH24-27K-90-5M-80	5000mm	10mm	1.6mm