



SYNDEO BY TAGRA® - 12V PLUG AND PLAY MULTI-PORT LED DRIVER

SYNDEO 
by Tagra®



 syndeosystem.com

 0800 088 3300

 orders@syndeosystem.com

FEATURES & BENEFITS

- Wiresafe Technology
- Plug & Play Simplicity
- A new level of safety
- Professional Integration
- Premium Interactivity



TECHNICAL INFORMATION

Drivers	30W
Input Voltage	AC220-240V
Output Voltage	12V
Input Current	0.2A
Max Total Output Current	-
Output Current Per Port	2.75A
Frequency	50/60Hz
Inrush Current	8.56A
Power Factor	PF>0.9
Short Circuit Protection	Yes
Overload Protection	Yes
Thermal Protection	Yes
Surge Protection	Yes
Working Temperature	-15°C to +45°C
Efficiency	>85%
IP Rating	IP20
Certification	CCC/TUV-CE/CB



PRODUCT OVERVIEW

Syndeo by Tagra® delivers a safe and simple, plug and play LED lighting system for professionals and DIY-ers alike.

WIRESAFE

This technology monitors the current being delivered to the ports and automatically cuts off power if the port exceeds 2.75A. This feature included in all Syndeo drivers offers a level of protection that's revolutionary to the driver market and conforms to DC Retail Lighting Standards.

Drivers	30W
Safety Standards	EN5022/ EN55015:2013/ A1:2015
Power Connection	IEC C7 Figure 8
Power Cable Length	1500mm
Number of Ports	6
Accessory Port	Yes

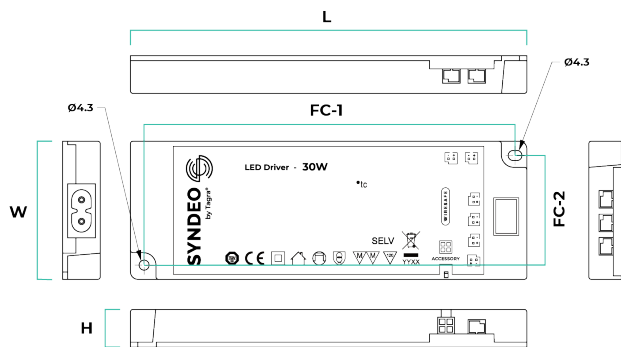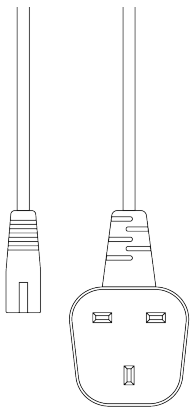

30W Driver

Length	- 158mm
Width	- 56mm
Height	- 16.5mm
Weight	- 0.12kg
FC-1	- 148.3mm
FC-2	- 46mm

DRIVER DIAGRAMS